


TOSHIBA 東芝


新鮮食品展示專用石英燈



燈座(Lamp base)

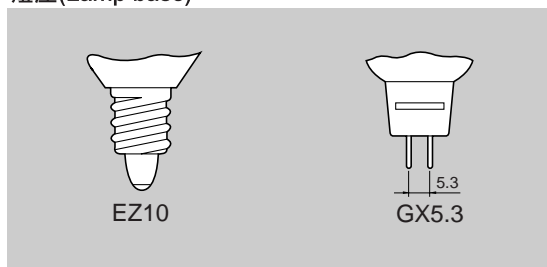

電磁波頻譜圖(Spectral energy distribution graphs)

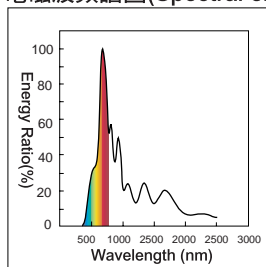

點燈實照 (50W/光起始角度20)




點燈實照 (50W/光起始角度38)



	產品型號	標準包裝 (支/箱)	尺寸		重量 (g)	燈座	電壓 (v)	輸出 功率 (w)	中央燭 光度 (cd)	光線 起始 角度	平均 壽命 (小時)
			管徑 (mm)	管長 (mm)							

50W	----	JR12V50W/K5MEZ-D	10	50	58	50	EZ10	12	50	3,300	20	4,000
	----	JR12V50W/K5FEZ-D	10	50	58	50	EZ10	12	50	1,400	38	4,000
50W	中角	JR12V50WM/EX-KD	10	50	61	46	EZ10	12	50	1,000	30	4,000
	廣角	JR12V50WF/EX-KD	10	50	61	46	EZ10	12	50	700	45	4,000

50W	----	JR12V50W/K5M-D	10	50	44	40	GU5.3	12	50	3,300	20	4,000
	----	JR12V50W/K5F-D	10	50	44	40	GU5.3	12	50	1,400	38	4,000
50W	中角	JR12V50WM/KD	10	50	48	35	GX5.3	12	50	1,000	30	4,000
	廣角	JR12V50WF/KD	10	50	48	35	GX5.3	12	50	700	45	4,000



富新工程有限公司

ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsat Tsz Mui Road, North Point, HK.

電話: (852)2570-8193

傳真: (852)2571-3150

中國熱線: (86) 135-60702932

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com


TOSHIBA 東芝

新鮮食品展示專用石英燈




波長為570至590 nm 之暖黃光，能使被照射之展品顏色更鮮艷

燈座(Lamp base)



電磁波頻譜圖(Spectral energy distribution graphs)

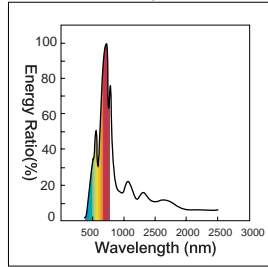


點燈實照 (75W/中角)




點燈實照 (75W/廣角)



配光曲線圖 (75W/中角)

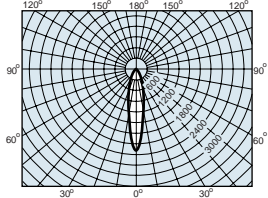

配光曲線圖 (75W/廣角)

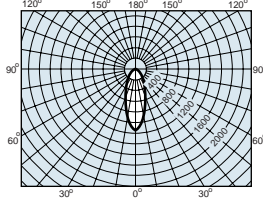

	產品型號	標準包裝 (支/箱)	尺寸		重量 (g)	燈座	電壓 (v)	輸出功率 (w)	中央燭光度 (cd)	光線起始角度	流明 (lm)	平均壽命 (小時)
			管徑 (mm)	管長 (mm)								
75W	中角 JDR110V75W/K5M-D	10	50	65	52	E11	110	75	2,200	20	860	2,500
	廣角 JDR110V75W/K5F-D	10	50	65	52	E11	110	75	1,100	35	860	2,500



富新工程有限公司

ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsz Tsz Mui Road, North Point, HK.

電話: (852)2570-8193

傳真: (852)2571-3150

中國熱線: (86) 135-60702932

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com