


美術及博物館專用光管




特色：
有效減低紫外線對展品傷害，真實顯示展品色彩。

用途：
美術及博物館展覽照明

燈座(Lamp base)



電磁波頻譜圖(Spectral energy distribution graphs)

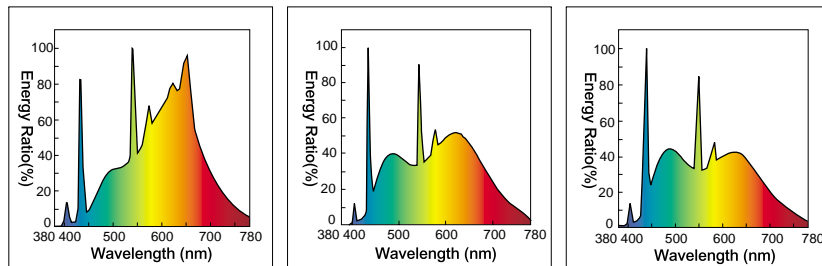

L-EDL

W-EDL

N-EDL


產品型號	標準包裝 (支/箱)	色溫 (K)	尺寸(mm)		重量 (g)	燈座	輸出 功率 (w)	電流 (A)	流明 (lm)	演色度 (Ra)	平均壽命 (小時)
			管徑	管長							

快速起動型

FLR20S•L-EDL/M•A•NU	25	3,000K	32.5	580	128	G13	20	0.360	690	95	7,500
FLR20S•W-EDL/M•A•NU	25	4,200K	32.5	580	128	G13	20	0.360	730	97	7,500
FLR40S•L-EDL/M•A•NU	25	3,000K	32.5	1,198	244	G13	40	0.420	1,850	95	10,000
FLR40S•L-EDL/M•NU	25	3,000K	32.5	1,198	244	G13	40	0.420	1,950	95	10,000
FLR40S•W-EDL/M•A•NU	25	4,200K	32.5	1,198	244	G13	40	0.420	1,820	97	10,000

高頻率型支架專用

FHF32L-EDL•P•NU	25	3,000K	25.5	1,198	198	G13	32	0.255	1,950	95	10,000
							45	0.425	2,600		
FHF32N-EDL•P•NU	25	5,000K	25.5	1,198	198	G13	32	0.255	1,950	99	10,000
							45	0.425	2,600		
FHF32W-EDL•P•NU	25	4,200K	25.5	1,198	198	G13	32	0.255	1,950	97	10,000
							45	0.425	2,600		



富新工程有限公司

ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsat Tsz Mui Road, North Point, HK.

電話: (852)2570-8193

傳真: (852)2571-3150

中國熱線: (86) 135-60702932

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com