


普通型手指膽




特色：

石英玻璃製造(JD-E,JD) 之高效率緊湊型燈泡，體積細小，具有聚光力良好。

燈座(Lamp base)

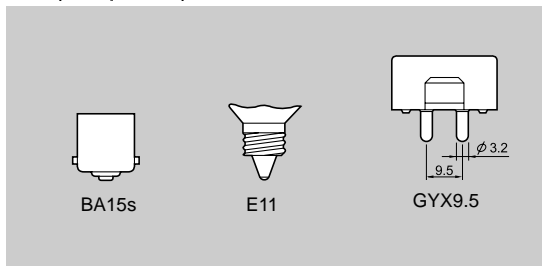

電磁波頻譜圖(Spectral energy distribution graphs)



產品型號	標準包裝(支/箱)	尺寸			重量(g)	燈座	電壓(v)	輸出功率(w)	流明(lm)	色溫(k)	平均壽命(小時)
		管徑(mm)	管長(mm)	光中心距離(mm)							
JL100V100W	10	30	66	40	11	BA15s	100	100	1,500	2,850	2,000
JL110V100W	10	30	66	40	11	BA15s	110	100	1,500	2,850	2,000

JD100/110V60W-E	10	11	67	49	9	E11	105	60	840	2,800	1,500
JD100/110V75W-E	10	11	67	49	9	E11	105	75	1,120	2,850	1,500
JD100/110V100W-E	10	11	67	49	9	E11	105	100	1,600	2,900	1,500
JD100/110V150W-E	10	14	72	51	13	E11	105	150	2,400	2,900	1,500
JD100/110V250W-E	10	14	78	56	14	E11	105	250	4,500	2,950	2,000
JD100/110V500W-E	10	14	93	66	15	E11	105	500	9,500	2,950	2,000
JD220V500W-E	10	14	93	66	15	E11	220	500	8,500	2,900	2,000

JD100/110V60WP-E	10	11	67	49	9	E11	105	60	840	2,800	1,500
JD100/110V75WP-E	10	11	67	49	9	E11	105	75	1,120	2,850	1,500
JD100/110V100WP-E	10	11	67	49	9	E11	105	100	1,600	2,900	1,500
JD100/110V150WP-E	10	14	72	51	13	E11	105	150	2,400	2,900	1,500
JD100/110V250WP-E	10	14	78	56	14	E11	105	250	4,500	2,950	2,000

JD110V250W	10	14	83	50	17	GYX9.5	110	250	4,500	2,950	2,000
JD110V500W	10	14	94	63	19	GYX9.5	110	500	9,500	2,950	2,000



富新工程有限公司
ENGINEERING Fu Sun Engineering Limited

香港北角七姊妹道208號昌利大廈3樓302室
Room 302, 3/F, Cheong Lee Building,
No. 208 Tsz Tsz Mui Road, North Point, HK.

電話: (852)2570-8193

傳真: (852)2571-3150

中國熱線: (86) 135-60702932

電郵: enquiry@fusun-toshiba.com

網址: www.fusun-toshiba.com